


VERSA

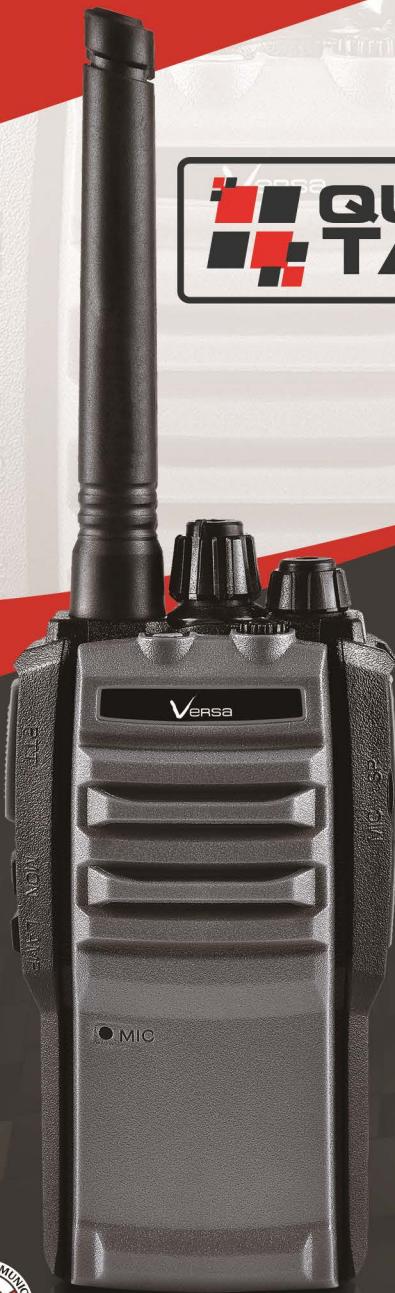

SRRS TWO-WAY RADIOS

MAIN FEATURES

- FREE NTC LICENSE ■
- 16 CHANNELS WITH PRE SELECTED ■
- SRRS FREQUENCIES ■
- 18HRS BATTERY LIFE, LI-ION ■
- CTCSS/DCS ■
- LOW POWER ALARM ■
- TIME-OUT-TIMER ■
- JACKLIGHT ■
- VOICE PROMPT ■

Buy online @ www.versa.ph

Like us on Facebook
versa.ph

GENERAL

Frequency Range	SRRS 325.000 - 325.4875 MHz PMR 446.00625 - 446.09375 MHz FRS 462.5625 - 467.7125
Channel	16 with Pre Selected SRRS Frequencies
Channel Spacing	SRRS/PMR12.5 KHz FRS 25 KHz
Operating Voltage	7.2V
Operating Temperature	25°C - +65°C
Battery	1500 mAh Li-Ion
Dimension (H'W'D)	118.5mm X 60.5mm X 40.5mm
Weight (with antenna & battery)	230g

TRANSMITTER

Output Power	2.5W (H), 0.5W (L)
Modulation	16KΦF3E/11KΦF3E
Maximum Deviation	<5.0/<2.5KHz
Modulation Sensitivity	12mV
Modulation Distortion	≤ 5%

RECEIVER

Sensitivity	122 dBm
Adjacent Channel Power	5KHz
Audio Power	≤ 0.5W
Audio Distortion	< 10%
Adjacent Channel Selectivity	≥ 65dB ≥60dB
Spurious Rejection	≥ 65dB
Blocking	≥ 85dB

OTHER FEATURES

Channel Scan, Wide/Narrow Bandwidth, Squelch Level Adjustment, High/Low Power Selective, Dual Watch Operation, Tail Tone Elimination

OPTIONAL ACCESSORIES

